


Application Notes


How to Edit User Account on HMI

When a button is pressed, **User Account Setting Screen** will be displayed.

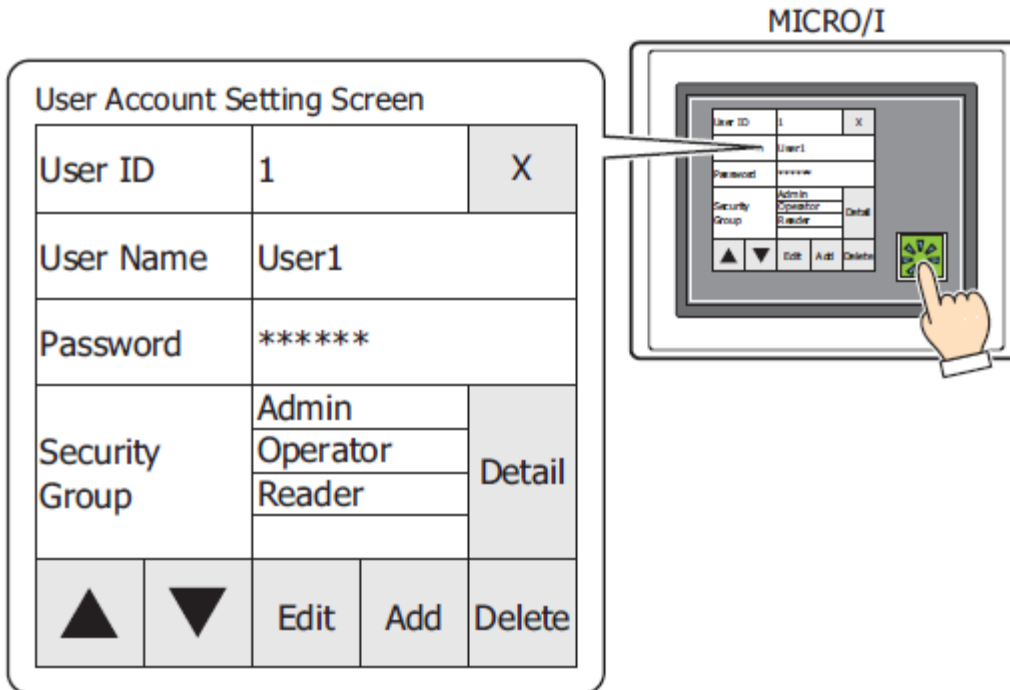


1) Editing a User Account

Press ▲ or ▼ to change the user number of the user account to edit.

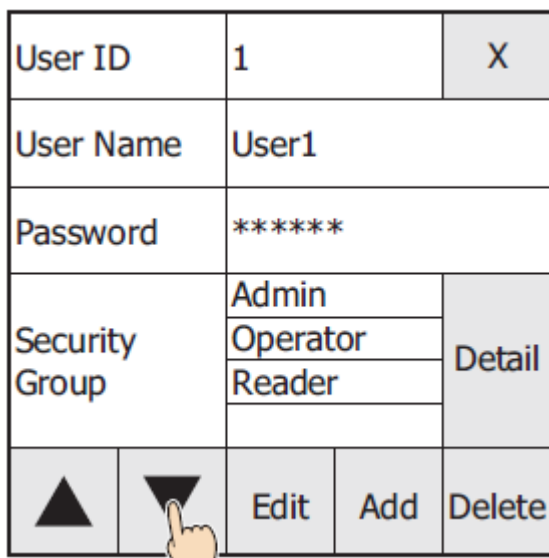


Press **Edit**.

User ID	2	X		
User Name	User2			
Password	*****			
Security Group	GroupA	Detail		
▲	▼	Edit	Add	Delete



To change the **User Name**, press **User Name** input frame

User ID	2	X
User Name	User2	
Password	*****	
Security Group	GroupA	Change
Edit User.	OK	CANCEL



Enter the user name and press **ENT**

Test02_						
Alpha bet	0	1	2	3	4	BS
	5	6	7	8	9	CLR
Sign	!	"	#	\$	%	CAN
	&	'	()	*	ENT
	+	SP	←	→		

To change a Password, press **Password** input frame

User ID	2	X
User Name	Test02	
Password	*****	
Security Group	GroupA	Change
Edit User.	OK	CANCEL


Enter a password and Press **Enter**

Password02_						
Alpha bet	0	1	2	3	4	BS
	5	6	7	8	9	CLR
Sign	!	"	#	\$	%	CAN
	&	'	()	*	ENT
	+	SP	←	→		


To change the Security Group, press **Change**

User ID	2	X
User Name	Test02	
Password	Password02	
Security Group	GroupA	Change
Edit User.	OK	CANCEL

Security groups are selected and cleared each time the names are pressed.
Press **Gr. 1~5**, **Gr. 6~10**, and **Gr. 11~15** to switch between the different sets of five security groups.


Gr. 1~5	Gr. 6~10	Gr. 11~15	Close
Gr. 1	Administrator		
Gr. 2	Operator		
Gr. 3	Reader		
Gr. 4	GroupA		
Gr. 5	GroupB		

Press **Close** to close the dialog box.

Gr. 1~5	Gr. 6~10	Gr. 11~15	Close
Gr. 1	Administrator		
Gr. 2	Operator		
Gr. 3	Reader		
Gr. 4	GroupA		
Gr. 5	GroupB		


Press **OK**

User ID	2	X
User Name	Test02	
Password	Password02	
Security Group	Admin	Change
	GroupA	
Edit User.	<input type="button" value="OK"/>	<input type="button" value="CANCEL"/>



And Press **OK** again

User ID	2	X
User Name	Test02	
Password	Password02	
Succeed		
<input type="button" value="OK"/>		




This concludes editing a user account.


2) Adding a User Account

To add User Account, press **Add**

User ID	1	X		
User Name	User1			
Password	*****			
Security Group	Admin	Detail		
	Operator			
	Reader			
▲	▼	Edit	Add	Delete



Enter user name, by pressing the User Name input frame

User ID	5	X
User Name		
Password		
Security Group		Change
Add User.	OK	CANCEL

Note: **User ID** displays the lowest user number (1 to 15) of all free numbers.

Enter the user name and press **ENT**.

User5_						
Alpha bet	0	1	2	3	4	BS
	5	6	7	8	9	CLR
Sign	!	"	#	\$	%	CAN
	&	'	()	*	ENT
	+	SP	←	→		

Enter the password and press **ENT**

User ID	5	X
User Name	User5	
Password		
Security Group		Change
Add User.	OK	CANCEL

To assign a Security Group, press **Change**


User ID	5	X
User Name	User5	
Password	Pass05	
Security Group		Change
Add User.	OK	CANCEL

Select a Security Group by pressing **Gr. 1~5**, **Gr. 6~10**, and **Gr. 11~15**

Gr. 1~5	Gr. 6~10	Gr. 11~15	Close
Gr. 1	Administrator		
Gr. 2	Operator		
Gr. 3	Reader		
Gr. 4	GroupA		
Gr. 5	GroupB		


Press **Close** and **OK**

User ID	5	X
User Name	User5	
Password	Pass05	
Security Group	GroupB	Change
Add User.	OK	CANCEL



Press OK again.

User ID	5	X
User Name	User5	
Password	Pass05	
Succeed		
OK		



User ID	5	X
User Name	User5	
Password	*****	
Security Group	GroupB	Detail
▲	▼	Edit Add Delete

This concludes adding the User Account.


3) Deleting a User Account

Press ▲ or ▼ to change the user number of the user account to delete.

User ID	1	X
User Name	User1	
Password	*****	
Security Group	Admin	Detail
	Operator	
	Reader	
▲	▼	Edit Add Delete


Press **Delete**

User ID	5	X		
User Name	User5			
Password	*****			
Security Group	GroupB	Detail		
▲	▼	Edit	Add	Delete



Press **OK**

User ID	5	X
User Name		
Password		
Succeed		
OK		



This concludes deleting the User Account.